

# BL-52T28L/BL-52T38L

## 2MP H.265 IP Camera



H.265



3D DNR



6KV Protection



True WDR



IP67




Starlight

### Features

- 2.0MP H.265 real-time coding
- 3D DNR, True WDR
- IR-Cut filter, Day&Night
- PoE power supply
- Lightning Protection up to 6KV
- IP67 ingress protection
- Support iOS/Android Phone/Pad, remote monitoring
- Video Linkage with Access Control System (BioSecurity 3.0)

### Dimensions

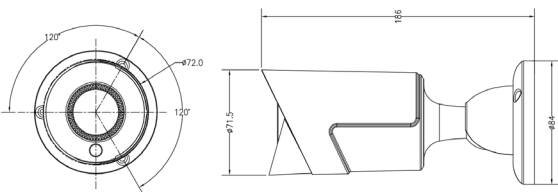

### Specifications

Model	BL-52T28L	BL-52T38L
<b>Camera</b>		
Image Size	1920*1080	
Image Sensor	2.0MP 1/2.8" Progressive Scan CMOS	
Min. illumination	Color: 0.01Lux @ (F1.2,AGC ON); 0 Lux with IR	
	B/W: 0.001Lux @ (F1.2,AGC ON); 0 Lux with IR	
Shutter Time	1/25s to 1/10,000s	
Lens	2.8-12mm Motorized	
Lens Mount	Φ14	
Horizontal FOV	30°-105°	
Day & Night	IR-Cut filter with auto switch	
Digital NR	3D DNR	
IR distance	20-30m	30-50m
<b>Image</b>		
Resolution	1080P (1920*1080), 1.3MP (1280*960), 720P (1280 * 720P), D1, CIF	
Main Stream	1920*1080@25fps	
Sub Stream	704*576@25fps/ 352*288@25fps	
Third Stream	1280*720@25fps	
Image Settings	Saturation, Brightness and Contrast are adjustable through Web browser or Client software.	
<b>Compression</b>		
Video Compression	H.265/H.264	
Bite Rate	32Kbps~8Mbps	
Encode Mode	VBR/CBR	
Audio	G.711A/G.711Mu/G.726/G.726ASF	
<b>Interface</b>		
Ethernet	1*10/100Mbps RJ45 Ethernet port	
Audio I/O	N/ A	
<b>Network</b>		
Network Storage	Support 802.1X	
Alarm Trigger	Motion Detection, Privacy Mask, Local Alarm, etc.	
Network Protocols	TCP/ IP, UDP, HTTP, IGMP, ICMP, DHCP, RTP/ RTSP, DNS, DDNS, FTP, NTP, PPPoE, UPNP, SMTP, SNMP	
Interface Protocol	ONVIF Profile S/API	
ROI	Support 4 fixed region for mainstream and sub stream separately	
Line cross detection	Cross a pre-defined virtual line, up to 1 pre-defined virtual line supported	
General Function	Anti-flicker, Dual-stream, Image Capture, Password Protection	
<b>General</b>		
Temperature	-30°C ~ 60°C	
Humidity	10%-90% RH	
Power Supply	DC12V±10% 2A, PoE:3W	
Protection Level	IP67	
Weight	350g	
Dimensions	186.5 (L)*71.7(W)*84 (H)mm	

