

DL-54N26B/DL-54N28B


4MP H.265 IP Camera



Features

- 4.0MP H.265 real-time coding
- 3D DNR, True WDR
- IR-Cut filter, Day&Night
- PoE power supply
- Lightning Protection up to 6KV
- Support iOS/Android Phone/Pad, remote monitoring
- IP67 ingress protection
- IK10
- Video Linkage with Access Control System(BioSecurity 3.0)

Dimensions

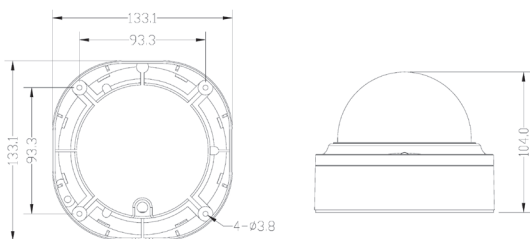

Specifications

Model	DL-54N26B	DL-54N28B
Camera		
Image Size	2560*1440	
Image Sensor	4.0MP 1/3" Progressive Scan CMOS	
Min. illumination	Color: 0.01Lux @(F1.2,AGC ON); 0 Lux with IR B/W: 0.001 Lux @(F1.2,AGC ON); 0 Lux with IR	
Shutter Time	1/25s to 1/10,000s	
Lens	2.8-12mm Varifocal	2.8-12mm Motorized
Lens Mount	Φ14	
Horizontal FOV	25°-91°	
Day & Night	IR-Cut filter with auto switch	
Digital NR	3D DNR	
IR Range	20-30m(30-50m optional)	
Image		
Resolution	4MP (2560*1440), 3MP (2048*1520, 2304*1296), 1080P (1920*1080), 720P (1280 * 720P), D1, CIF	
Main Stream	2560*1440@25fps	
Sub Stream	704*576@25fps	
Third Stream	1280*720@25fps	
Image Settings	Saturation, Brightness and Contrast are adjustable through Web browser or Client software.	
Compression		
Video Compression	H.265/H.264	
Bite Rate	32Kbps~8Mbps	
Encode Mode	VBR/CBR	
Audio	G.711A/G.711Mu/G.726/G.726ASF	
Interface		
Ethernet	1*10/100Mbps RJ45 Ethernet port	
Audio I/O	N/ A	
Network		
Network Storage	Support 802.1X	
Alarm Trigger	Motion Detection, Private Masking, Video Masking, Local Alarm, etc.	
Network Protocols	TCP/IP, UDP, HTTP, IGMP, ICMP, DHCP, RTP/RTSP, DNS, DDNS, FTP, NTP, PPPOE, UPNP, SMTP, SNMP	
Interface Protocol	ONVIF Profile S/ API	
ROI	Support 4 fixed region for mainstream and sub stream separately	
Line Cross Detection	Cross a pre-defined virtual line, up to 1 pre-defined virtual lines supported	
General Function	Anti-flicker, Dual-stream, Image Capture, Password Protection	
General		
Temperature	-30 C ~ 60 C	
Humidity	10%-90% RH	
Power Supply	DC12V±10% 2A, PoE; Max. 3W	
Protection Level	IP67	
Weight	500g	
Dimensions	Φ133.1x104mm	

