

# BS-32D11K/BS-32D12K/BS-32D13K

## 2MP HD 4 in 1 Camera



DWDR



AWB



6KV  
Protection



Day&Night




IP67

### Features

- IR distance: 10-20m
- DNR, DWDR
- Lightning Protection up to 6KV
- AHD/TVI/CVI/CVBS video output
- IP67 ingress protection
- Video Linkage with Access Control System (BioSecurity 3.0)

### Dimensions

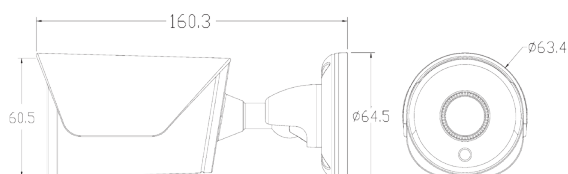

### Specifications

|                     |                                                   |           |           |
|---------------------|---------------------------------------------------|-----------|-----------|
| Model               | BS-32D11K                                         | BS-32D12K | BS-32D13K |
| Camera              |                                                   |           |           |
| Image Sensor        | 1/2.7" 2MP CMOS                                   |           |           |
| Efecitive Pixels    | 1920*1080                                         |           |           |
| Shutter Time        | 1/25s~1/50,000s (PAL);1/30s~1/60,000s (NTSC)      |           |           |
| Image System        | PAL/NTSC                                          |           |           |
| Video Frame System  | 1080P@25fps (PAL);1080P@30fps (NTSC)              |           |           |
| IR distance         | 10 ~ 20m                                          |           |           |
| Video Output        | AHD/TVI/CVI/CVBS                                  |           |           |
| Lens                | 2.8mm                                             | 3.6mm     | 6mm       |
| Lens Mount          | M12                                               |           |           |
| Horizontal FOV      | 120°                                              | 85°       | 54°       |
| S/N Ratio           | ≥41dB                                             |           |           |
| Functions           |                                                   |           |           |
| OSD                 | UTC support based on DVR                          |           |           |
| AGC                 | Support                                           |           |           |
| White Balance       | Auto/Manual                                       |           |           |
| Day & Night         | Auto/Manual                                       |           |           |
| Video Setting       | Contrast/Sharpness/Color Gain/<br>Format/DWDR/DNR |           |           |
| Language            | Multi-Language                                    |           |           |
| General             |                                                   |           |           |
| Casing              | Aluminium alloy                                   |           |           |
| Ingress Protection  | IP67                                              |           |           |
| Working Environment | -30℃ ~ 60℃ /Humidity 10%~90℃ RH                   |           |           |
| Power Supply        | DC12V±10% 1.5A                                    |           |           |
| Power Consumption   | 3.2W MAX (IR cut off)                             |           |           |
| Dimensions          | 160.3 (L)*63.4 (W)*64.5 (H)mm                     |           |           |
| Net Weight          | 300g                                              |           |           |

