

# EL-32D28I

## 2MP HD 4 in 1 Camera



DWDR



AWB



6KV  
Protection



Day&Night




IP67

## Features

- IR distance:20-30m
- 3D DNR, DWDR
- Lightning Protection up to 6KV
- AHD/ TVI/ CVI/ CVBS video output
- IP67 ingress protection
- Video Linkage with Access Control System (BioSecurity 3.0)

## Dimensions

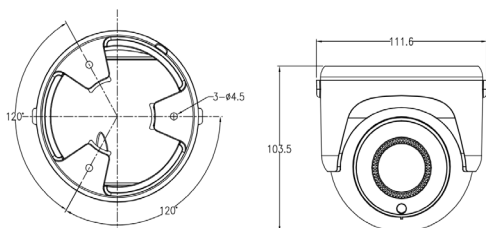

## Specifications

Model	EL-32D28I
<b>Camera</b>	
Image Sensor	1/2.7" 2MP CMOS
Efactive Pixels	1920*1080
Shutter Time	1/25s~1/50,000s (PAL);1/30s~1/60,000s (NTSC)
Image System	PAL/ NTSC
Video Frame System	1080P@25fps (PAL); 1080P@30fps (NTSC)
IR Distance	20-30m
Video Output	AHD/ TVI/ CVI/ CVBS
Lens	2.8-12mm Motorized
Lens Mount	Φ14
Horizontal FOV	30°-99°
S/N Ratio	≥41dB
<b>Functions</b>	
OSD	UTC support based on DVR
AGC	Support
White Balance	Auto/ Manual
Day & Night	Auto/ Manual
Video Setting	Contrast/ Sharpness/ Color Gain/ Format/ DWDR/ DNR
Language	Multi-Language
<b>General</b>	
Casing	Aluminium alloy
Ingress Protection	IP67
Working Environment	-30℃ ~ 60℃ / Humidity 10%~90℃ RH
Power Supply	DC12V±10% 1.5A
Power Consumption	3.2W MAX (IR cut off)
Dimension	Φ111.6*105mm
Net Weight	400g

