

BS-34F11K/BS-34F12K/BS-34F13K

4MP HD 4 in 1 Camera



True WDR



AWB



6KV
Protection



Day&Night




IP67

Features

- IR distance: 10-20m
- DNR, True WDR
- Lightning Protection up to 6KV
- AHD/TVI/CVI/CVBS video output
- IP67 ingress protection
- Video Linkage with Access Control System (BioSecurity 3.0)

Dimensions

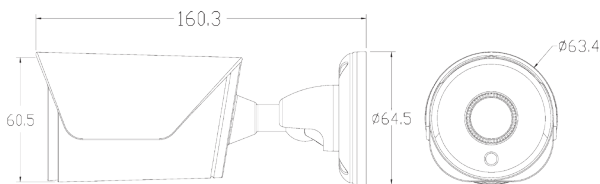

Specifications

Model	BS-34F11K	BS-34F12K	BS-34F13K
Camera			
Image Sensor	1/3" 4MP CMOS		
Efective Pixels	2560*1440		
Shutter Time	1/25s~1/50,000s (PAL); 1/30s~1/60,000s (NTSC)		
Image System	PAL/NTSC		
Video Frame System	4MP@25fps (PAL); 4MP@30fps (NTSC)		
IR Distance	10 ~ 20m		
Video Output	AHD/TVI/CVI/CVBS		
Lens	2.8mm	3.6mm	6mm
Lens Mount	M12		
Horizontal FOV	106°	75°	48°
S/N Ratio	≥50dB		
Functions			
OSD	UTC support based on DVR		
AGC	Support		
White Balance	Auto/Manual		
Day & Night	Auto/Manual		
Video Setting	Contrast/Sharpness/Color Gain/Format/True WDR/DNR		
Language	Multi-Language		
General			
Casing	Aluminium alloy		
Ingress Protection	IP67		
Working Environment	-30°C ~ 60°C /Humidity 10%~90°C RH		
Power Supply	DC12V±10% 1.5A		
Power Consumption	3.5W MAX (IR cut off)		
Dimensions	160.3(L)*63.4(W)*64.5(H)mm		
Net Weight	300g		

