

DL-34F11B/ DL-34F12B/ DL-34F13B

4MP HD 4 in 1 Camera



True WDR



AWB



6KV
Protection



Day&Night



IP67




IK10

Features

- IR distance: 10-20m
- DNR, True WDR
- Lightning Protection up to 6KV
- AHD/TVI/CVI/CVBS video output
- IP67 ingress protection
- IK10
- Video Linkage with Access Control System (BioSecurity 3.0)

Dimensions

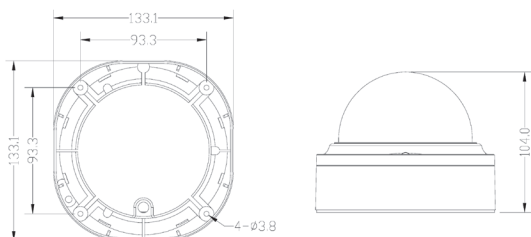

Specifications

Model	DL-34F11B	DL-34F12B	DL-34F13B
Camera			
Image Sensor	1/3" 4MP CMOS		
Efective Pixels	2560*1440		
Shutter Time	1/25s~1/50,000s (PAL);1/30s~1/60,000s (NTSC)		
Image System	PAL/NTSC		
Video Frame System	1080P@25fps (PAL);1080P@30fps (NTSC)		
IR Distance	10 ~ 20m		
Video Output	AHD/TVI/CVI/CVBS		
Lens	2.8mm	3.6mm	6mm
Lens Mount	M12		
Horizontal FOV	106°	75°	48°
S/N Ratio	≥50dB		
Functions			
OSD	UTC support based on DVR		
AGC	Support		
White Balance	Auto/Manual		
Day & Night	Auto/Manual		
Video Setting	Contrast/Sharpness/Color Gain/ Format/True WDR/DNR		
Language	Multi-Language		
General			
Casing	Aluminium alloy		
Ingress Protection	IP67		
Working Environment	-30℃ ~ 60℃ /Humidity 10%~90℃ RH		
Power Supply	DC12V±10% 1.5A		
Power Consumption	3.5W MAX (IR cut off)		
Dimensions	Φ133.1*104.0mm		
Net Weight	500g		

