



VDPI-B2

7 Inch Indoor Video Door Phone System

Features



- 7 inch digital LCD panel indoor monitor
- Classic design in hands-free style
- Text OSD menu & color icons
- Operate by touch sensor buttons
- Supports auto-taking pictures
- Supports maximum 32GB SD card
- Adjustable Color/ Brightness/ Contrast/ Volume/ Display mode
- Intercom call/ Broadcast function/ Monitor listening
- 1 Indoor station maximally supports 2 outdoor stations and 1 slave indoor station
- Real-time monitoring to door station
- 12 ringtones for free switch

Technical Specifications

Display	7 inch digital LCD (800*480)
Connection	4 wire (power, video, audio, grounding)
Power Supply	15V DC
Power Consumption (Working Mode)	9W (max.), 1.5W (stand by)
Audio	300mVp-p (1KHz, 300Ω)
Audio Distortion	≤3%
Video	1Vp-p 75Ω (input)
Working Temperature	0℃ to +40℃
Storage Temperature	-30℃ to +60℃
Distance (Indoor to Outdoor)	60m (RVV4x0.5) 100m (RVV3*0.5+SYV75-3)

Applications



Banks



Factories



Villa



Residence




Hotels



Warehouses


Dimensions (mm)

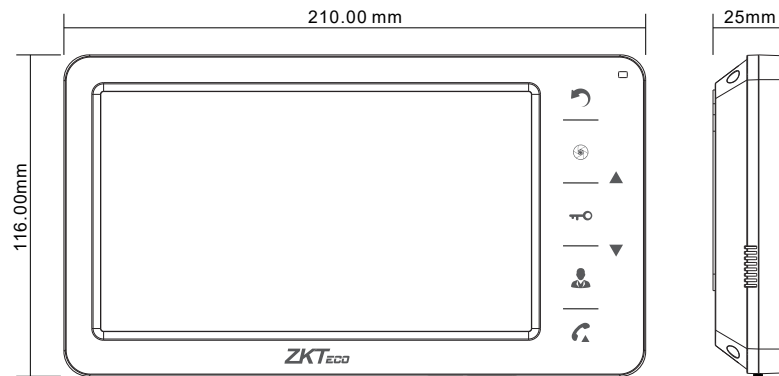

Functions



- 1 Return button: Return/ hang off
- 2 Indicator light: Power indicator light
- 3 Photo capture and setting button: Photo capture/ enter system settings/ confirm
- 4 Navigation button up: Choose/ adjust + Unlock
- 5 button: Unlock
- 6 Navigation button down: Choose/ adjust +
- 7 Monitor button: Monitor
- 8 Answer button: Answer/ call
- 9 Power on/ off
- 10 LCD

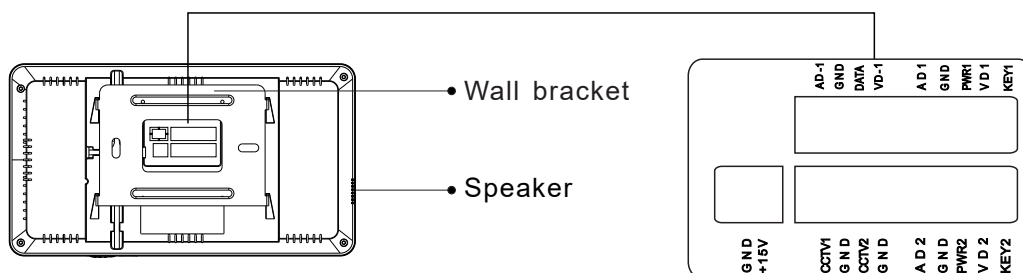

Main Unit and Accessories



Monitor



User Manual



Wall Bracket



Expansion Bolt



Screws



5 Pin Connector



4 Pin Connector



Power Adaptor



ZKTECO CO.,LTD.
www.zkteco.com
E-mail: sales@zkteco.com

© Copyright 2018, ZKTeco Inc. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All Specifications are subject to change with out notice. All rights reserved.

