

# ProID Series

## Physical Access Readers



ProID10



ProID40



ProID20



ProID30

The ProID family of card readers is designed to provide different options for customers. Which can support 125KHz EM, 13.56MHz MIFARE/DESFire/FeliCa/Legic.

ProID card reader adopts all-weather protection design with architectural crafting, grand appearance, and easy indoor & outdoor installation and application.

## Features

- With upgraded card reading solution comes higher stability of operation and energy efficiency.
- LED lights and Touch Keypad.
- Wiegand data port with 26-digit or 34-digit output for customization.
- Sealed design suitable for both indoor and outdoor use.
- Black or White color available

## Specifications

### Read Range

ProID10 EM/IC 3.5cm  
ProID20/30/40 EM/IC 5cm

### Reading Time

≤300ms

### Input Port

External LED Control  
External Buzzer Control

### Material

ABS+PC

### Output Format

Wiegand 26bit or 34bit Adjustable

### Power

Operating Voltage 7 ~ 13VDC  
Current Draw < 80mA

### LED

Pulsing White Standby Light  
Red and Green LEDs

### Operating Temperature

-20 °C ~ 65 °C

### Operating Humidity

10% ~ 90% Relative Humidity  
Non-Condensing

### Audio

Beep

### Index Protection


IP65

### Dimensions

ProID10: 80.5 × 44 × 15mm  
ProID20/30: 90 × 90 × 16mm  
ProID40: 116 × 75 × 15mm

## ProID series order instructions

# ProID10 WE-RS

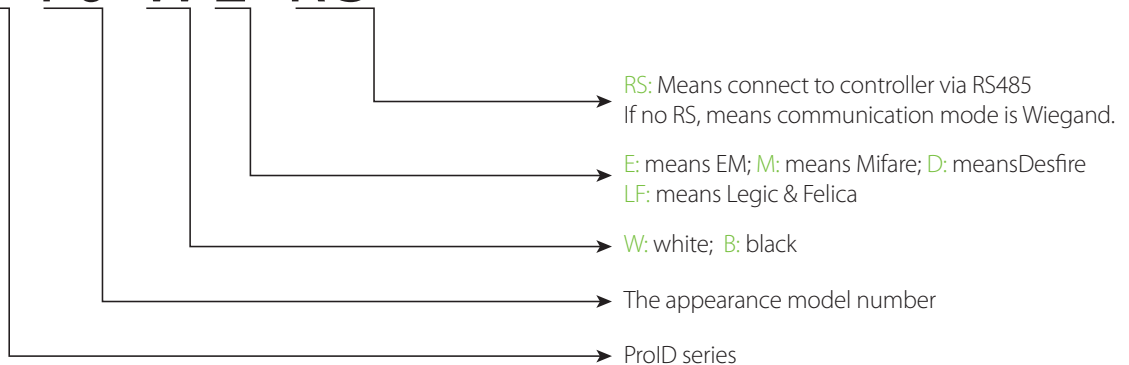

ZKTeco Middle East  
E-mail: [sales@zkteco.me](mailto:sales@zkteco.me)  
[www.zkteco.me](http://www.zkteco.me)

© Copyright 2015, ZKTeco Inc. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

