

SBTL6000 WP

Swing Barrier with IPX4



The SBTL6000 WP series offers a group of single-lane swing barrier turnstiles designed for smooth and quiet operation and draws very little power. With ingress protection of IPX4, turnstiles can be used outdoor even in bad weather. SBTL6000 WP barriers are usually held in locked status, thus denying access to the secured side. Upon the SBTL6000 WP's reader (RFID and/or fingerprint verification) positively recognizing a user's valid access card or fingerprint, its barriers swing automatically, thus allowing users passage to the secured side. During a power outage, the user can push through the barrier easily to exit to safety. SBTL6000 WP provides both security and convenient space, all in a very durable and elegant compact design.

Features

Reliability

- Turnstiles can be used outdoor even in bad weather (IPX4 certified)
- SUS304 stainless steel casework ensure long-lasting durability
- High quality electrical components


Safety

- Anti-collision
- Barrier unlock automatically during a power outage
- Fast and straightforward card and fingerprint authentication

Specifications

Power Requirements	AC 100 ~ 120V / 200 ~ 240V, 50 / 60Hz
Working Temperature	-28°C ~ 60°C
Working Humidity	20% ~ 95% (non-condensing)
Working Environment	Indoor / Outdoor
Lane Width (mm)	635
Infrared Sensor	6 pairs
Dimension(L*W*H)	1400 * 180 * 1000 (mm)
Dimension with Packing(L*W*H)	1580 * 340 * 1270 (mm) (2pcs)
Weight with Packing(kg)	150
LED Indicator	Support
Cabinet Material	SUS304 Stainless Steel
Lid Material	SUS304 Stainless Steel + Acrylic
Barrier Material	Tempered Glass
Barrier Movement	Swing
Emergency Mode	Support
Ingress Protection	IPX4

Dimensions (mm)

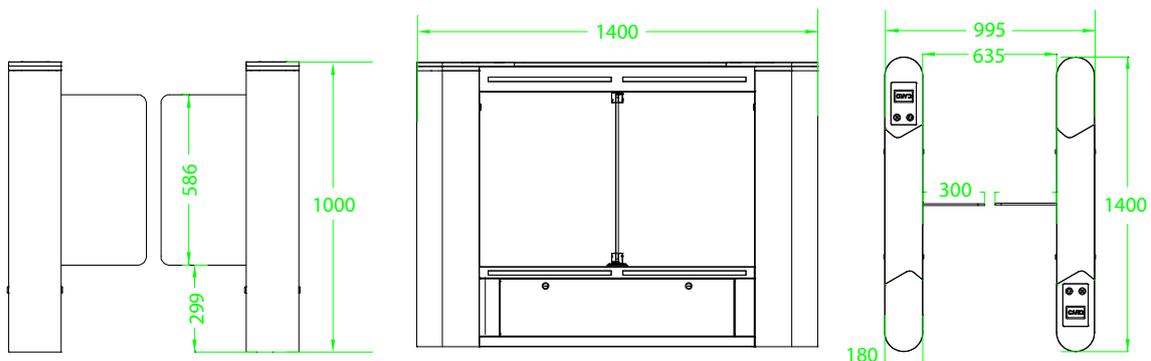

* Turnstile can work in the temperature of -20°C to 70°C. If the temperature is under -20°C, acrylic parts may be broken. (Temperature control device is optional to solve this problem.)

