


# Z8536NHR/Z8564NHR

36/64-Channel 4K H.265+ Network Video Recorder



- H.265+/H.265/H.264 decoding
- Support 36- or 64-channel 4K IP cameras input
- Support 16 channels real-time playback synchronously
- HDMI output up to 4K high definition
- Intelligent video analytics functions (up to IPC)
- DHCP, DNS, DDNS, NTP, UPNP, RTSP, etc.
- Support multiple web browsers login
- P2P cloud service supported
- ONVIF Profile S compatible

## System Overview

NVR of the Z8000NHR series could deliver up to 4K resolution excellent image over advanced H.265+ decoding. It's an ideal consideration for the balance of quality, performance, and budget.

The user-friendly GUI provides intuitive shortcut operations, remote control, management, flexible storage, and playback. Powered by the reliable interoperability and ONVIF Profile S, it's compatible with plenty of 3rd-party IPC or crossing platform VMS. The devices can be used in governmental institutions, bank sectors, manufacturers, educational or commercial projects.

## Functions

IVA functions supported (Intelligent Video Analytics) such as Line Crossing / Target Counting / Object Left/Lost / Intrusion / Scene Change / VQD, etc. (up to IPC)

User-friendly & full function VMS / Mobile App

Alarm events linkage actions such as email, audio, buzzer and alarm push message to Mobile App and VMS

## Technical Parameters

Model	Z8536NHR	Z8564NHR
<b>System</b>		
Main Processor	Multi-core embedded processor	
Operating System	Embedded LINUX	

<b>Video and Audio</b>		
Max IPC Input	36CH	64CH
Two-way Talk	Support	
Audio Compression	G.711u	
<b>Live View</b>		
Display Split	1/4/6/9/16/36 CH	1/4/6/9/16/36/64 CH
Resolution	8MP(3840*2160) / 5MP(2592*1944) / 2MP(1920*1080) / 1.3MP(1280*1024) / 1Mp(1280*720) / D1(1024*768)	
Live View Capability	36CH@D1(25/30fps)	
<b>Recording</b>		
Video Compression	H.265+ / H.265 / H.264	
Recording Resolution	8Mp/5MP/4MP/3MP/1080P/960P/720P/D1	
Max. Decoding Capability	36CH@D1(25/30fps)	
Incoming Bandwidth	216 Mbps	512 Mbps
Bit Rate	Main Stream: 256Kbps ~ 8192Kbps	
	Sub Stream: 50Kbps ~ 700Kbps	
Record Mode	Schedule, Manual, Motion Detection, IVA Events Alarm	
Record Interval	1 ~ 120 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec	
<b>Playback and Backup</b>		
Playback Channel	16CH	
Search Mode	Time/ Date, Alarm Types, IVA Search	
Playback Function	Play, Stop, Play Forward, Play Backward, 30 Seconds Forward, 30 Seconds Backward, Fast Play, Slow Play, Single Frame Play, Hide/Show Time Bar, Backup, Snapshot, Full Screen	
Backup Mode	USB Device / Network Remote	
<b>IVA Alarm</b>		
Local IVA Functions	Line Crossing / Target Counting / Object Left/Lost / Intrusion / Scene Change / VQD	
Regular Detection	Motion Detection / Video Shelter / Video Loss	
AI Search	Support search target video by multiple intelligent conditions	
<b>Network</b>		
Network Protocol	TCP/IP, HTTP, DDNS, SMTP(SSL), DHCP, PPPoE, UPnP, NTP, P2P	
Max. Online User	5	
Web Browser	Internet Explorer	
Operation System	Windows	
Management Platform	AntarVis 2.0	
Mobile Application	AntarView Pro (iOS & Android)	
P2P Cloud Service	Support	
Interoperability	ONVIF Profile S, SDK, CGI, API	

### Storage & Auxiliary Interface

SATA Ports	9 SATA Ports, up to 8 TB capacity
eSATA	Support
Raid 0/1/5/6/10	Support
HDMI	1*HDMI (4K)
VGA	1920*1080/60Hz, 1280*1024/60Hz
Network Interface	2 RJ-45 Port (1000Mbps)
PoE Ports	N/A
USB	1*USB 2.0, 1*USB 3.0
Audio Input/Output	1/1
Alarm Input/Output	4/4
RS-485	Support

### Power

Power Supply	AC100~240V, 47Hz~63Hz
Power Consumption	35W (Without HDD)


### General

Casing	2U
Working Temperature	-10°C ~ 55°C / 14°F ~ 131°F
Working Humidity	10% ~ 90%
Dimensions (L*W*H)	412 * 430 * 87 (mm)
Net Weight	7kg (without HDD)
Gross Weight	7.5kg (without HDD)

### Order Information

Name	Model	Description
NVR	Z8536NHR	36CH H.265+ NVR, 9SATA
	Z8564NHR	64CH H.265+ NVR, 9SATA

### Dimensions (mm)

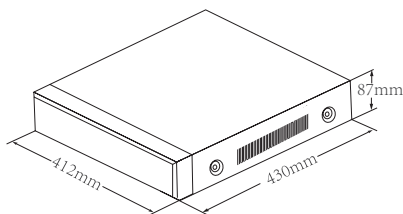

### Rear Panel

